


HYDRAULIC CARTRIDGE FOR WP OPEN EN

Technical sheet:

Compression		Rebound
22x0.25		3x20x0.10
11x0.3		12x0.10
12x0.15		19x0.10
14x0.10		18x0.10
16x0.10		16x0.15
17x0.10		14x0.15
18x0.10		12x0.15
19x0.10		11x0.3
20x0.10		16x0.25
21x0.10		
22x0.10		
23x0.10		
24x0.10		
8x25x0.10		
14x0.10		
3x25x0.10		

Bypass
16x0.15
18x0.15
20x0.15

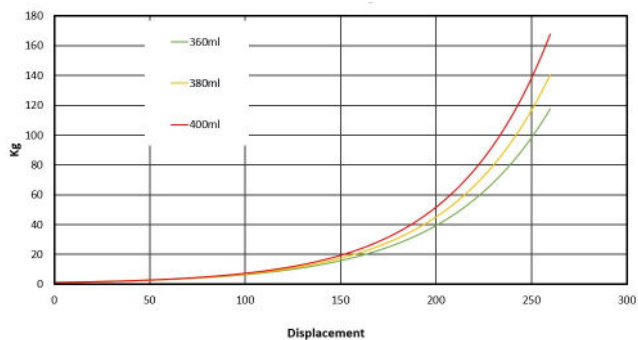

Compression click	Rebound click	Preload
AP 13	AP 12	8^ Spring(standard) 505 mm
		12^ Spring 485 mm
		16^ Spring 465 mm
Bladder pression	Cartridge oil	Fork oil
1.6 Atm	CUBE 190ml	CUBE 350 ml